

EXECUTIVE SUMMARY OF  
DRAFT EIA REPORT  
OF  
**SARVANI LABS PVT LTD**

For

Proposed Bulk Drugs & Intermediates  
Manufacturing Unit

AT

**SY NO: 109, JAYANTHIPURAM (V), JAGGAYYAPET (M),  
KRISHNA DISTRICT, ANDHRA PRADESH.**

PREPARED BY



**Rightsource Industrial Solutions Pvt. Ltd**

Plot No: 203, H.No:5-36/203, Prashanthi Nagar,  
IDA, Kukatpally, Hyderabad – 500072.

Ph: 040-65873137, 23070602, 23075699, 40126589.

Fax: 040-23070602. Mail: info@rightsource.co.in

NABET Accreditation No. NABET/EIA/1518/SA 038

## 1. INTRODUCTION

**Sarvani Labs Pvt Ltd** Proposed to establish a Bulk Drugs & Intermediates manufacturing unit at Sy No: 109, Jayanthipuram Village, Jaggayyapet Mandal, Krishna District, Andhra Pradesh.

The industry proposed to establish a unit in an area of **2.93 Acres (11843 SQM)**. The Industry is having its administrative office at C-1-86, Opp: Panchayati Office, Subbayagudem, Penuganchiprolu, Krishna District, Andhra Pradesh. The proposed project cost is about **Rs. 6.38 Crores**, which includes construction of the buildings, equipment, machinery and greenbelt development.

The project proposal was considered and appraised by the Expert Appraisal Committee (EAC) in its 20<sup>th</sup> Meeting held during 27<sup>th</sup> - 28<sup>th</sup> February, 2017. The MoEF&CC has given Terms of Reference vide F. No: J-11011/38/2017-IA II (I) Dated on 31<sup>st</sup> May 2017, to carryout EIA Study. The Environmental monitoring and analysis were carried out by Savant Envitech Pvt Ltd, (Having NABL Accreditation and MoEF&CC Registration) during the period of **March – 2017 to May – 2017** and Draft EIA Report was prepared and submitted for Public Consultation.

### 1.1. PROJECT DESCRIPTION

The salient features of the unit are furnished below.

**TABLE-1: SALIENT FEATURES OF THE PROJECT**

<b>Project location</b>	<b>Details</b>
Name of the project	<b>Sarvani Labs Pvt. Ltd</b>
Location of the project	Sy No: 109, Jayanthipuram (V), Jaggayyapet (M), Krishna District, Andhra Pradesh
Latitude & Longitude	<b>Latitude:</b> 16°50'53.72"N <b>Longitude:</b> 80°08'21.02"E
Land acquired for the plant	2.93 Acres (11843 Sq.m)
Present Land use of the project site	Patta land
Nearest Habitation	Jayanthipuram – 1.98 KMs (WNW).
Major urban Settlements	Vijayawada - 57 KMs (SE)
Nearest Highway	National Highway No.65 – 4.40 kms (N)
Nearest Railway station	Motumuri Railway Station - 22 kms (NE)
Nearest Airport	Vijayawada Airport - 77 kms (SE)
Major Industries near the plant site	VBC Fertilizers & Chemicals Ltd – 60 Mtrs - N Amoda Iron & Steel Ltd – 2.0 Kms – NW The Ramco Cements – 3.5 Kms – NW

	Mine of VSP – 9.8 Kms – NW Jaggayapeta Industrial Estate – 7.6 Kms – NNW CKS Laboratories Pvt Ltd – 2.6 Kms – SSW Mylan Laboratories Limited – 8.4 Kms – W RA Chem Pharma Pvt Ltd – 8.0 Kms - W
Water Bodies with in 10 KMs radius	Palleru River – 3.6 kms (W) Krishna River – 3.7 kms (SSW) Water body near Project Site- 0.2 kms (SSW) Gauravaram Cheruvu – 5.5 kms (E) Nagarjuna Sagar Left bank Canal- 2.4 kms (ESE) Pochampalli Cheruvu – 3.4 kms (ESE) Konakachi Cheruvu – 5.6 kms (ESE) Nawabpeta Cheruvu – 9.2 kms (ESE) Water body near Jaggayapet – 5.8 kms (NW) Tank Near Chillakallu – 4.9 kms (N) Tank near Shermohammedpet – 8.7 kms (NNW) Chillakallu Major canal - 2.2 km (WNW)
Reserve Forests with in 10KMs radius	Jaggayapeta Extension R.F - 712 mtrs (S) Kuntimadi R.F- 5.42 km (SW) Ginjudalle R.F- 5.9 km (SSW) Venkatayapalem R.F- 8.1 km (SSW) Budavada R.F- 5.1 km (WNW)

## 2.0 PROCESS DESCRIPTION

The manufacturing process of Bulk Drugs & Intermediates consists of chemical synthesis extending to stages of processing involving different type of chemical reactions. Total production capacity of proposal will be **9.00 TPM**. (Given in Table - 2). The unit will take adequate control measures for storage and handling of Raw materials and cylinders with in factory premises.

**TABLE- 2: PROPOSED PRODUCTS AND QUANTITIES**

S. No.	Name of the Product	CAS No.	Therapeutic Category	Quantity in Kg/Day	Quantity in TPM
1	Closantel Amine	61437-85-2	Intermediate	100.00	3.00
2	Closantel Sodium	61438-64-0	Anti- Helminthic	66.67	2.00
3	Niclosamide	50-65-7	Tape Worm Infections	33.33	1.00
4	Rafoxanide	22662-39-1	Anti- Helminthic, Fasciolicide	33.33	1.00
5	Triclabendazole	68786-66-3	Fascioliasis	66.67	2.00
<b>Total</b>				<b>300.00</b>	<b>9.00</b>

## 2.1 RESOURCE REQUIREMENT & INFRASTRUCTURE FACILITIES

### A) Land Use Details:

**Sarvani Labs Pvt. Ltd** to be established in an area of 2.93 Acres (11843 SQM), the usage details are given table 3.

**TABLE- 3: PROPOSED LAND USE DETAILS**

S. No.	DESCRIPTION	AREA IN SQM	AREA IN ACRES	AREA IN %
1	Total Built up Area	2986.15	0.74	25.25
2	Green Belt Area	4329.25	1.08	36.87
3	Roads Area	3660	0.9	30.72
4	Open Area/Parking	867.6	0.21	7.16
	<b>TOTAL</b>	<b>11843.00</b>	<b>2.93</b>	<b>100</b>

- **36.87 % of Land Allotted For Green Belt Development**

### B) Proposed Water Consumption Details

**TABLE- 4: PROPOSED WATER CONSUMPTION DETAILS**

S.No	Purpose	Water Input in KLD
1	Process	3.00
2	Washings	0.50
3	Boiler make up	18.00
4	Cooling towers make up	12.00
5	Scrubber	0.50
6	Domestic	1.50
7	Gardening	3.00
	<b>Total</b>	<b>38.50</b>

- The fresh water of **29.63 KLD** will be met from Ground Water sources.
- Recovered water **8.87 KLD** from ZLD system is reused.

### C) Energy Requirement

Power requirement of proposed project will be made available through Andhra Pradesh Southern Power Distribution Corporation Limited [APSPDCL]. The power requirement for the project will be 500 KVA.

**D) Utilities:**

For generation of Steam, the industry proposed to install 3 TPH coal fired boiler. The coal requirement will be met from government allocation or from local authorized sources.

The unit is proposing 320 KVA DG set, for usage during the power failures.

The emission details are presented in below table No.6 & 7.

**TABLE- 5: DETAILS OF UTILITIES**

S. No	Description	Capacity
1	Coal fired boiler	3 TPH
2	D.G. Set	320 KVA
3	Cooling Towers	200 TR
4	Electricity supply from APSPDCL.	500KVA
<b>Fuel</b>		
5	Coal	Proposed - 7.5 TPD (3 TPH Boiler )
6	Diesel	51 Liters/Day

**TABLE- 6: EMISSION CHARACTERISTIC DETAILS OF PROPOSED BOILER**

Particulars	Units	3.0 TPH Coal fired Boiler
Type of Fuel	--	Indian Coal
Coal Consumption	TPD	7.5
Ash Content	%	47
Sulphur Content	%	0.5
Nitrogen Content	%	1.1
No. of Stacks	No	1
Height of stack	M	30
Diameter of Stack	M	0.5
Temperature of Flue Gas	°C	180
Velocity of Flue Gas	m/s	16
Particulate Matter at outlet of Bag filter (Based on 115 mg/Nm <sup>3</sup> at outlet)	gm/sec	0.11
Sulphur dioxide emission 110 mg/Nm <sup>3</sup>	gm/sec	1.2
Oxides of Nitrogen emission 120 mg/Nm <sup>3</sup>	gm/sec	2.1
Pollution control equipment	-	Cyclone separator followed by suitable pack of Bag filters

**TABLE- 7: STACK EMISSION DETAILS OF PROPOSED DG SET**

Capacity In KVA	Emission of SPM in mg/Nm <sup>3</sup>	Emission Of SO <sub>2</sub> in mg/Nm <sup>3</sup>	Emission of NO <sub>x</sub> in mg/Nm <sup>3</sup>	Stack dia. in m	Flue Gas Temp. in °C	Stack Height in m	Flue gas Velocity in m/sec.
320 KVA	70.0	135.0	160.0	0.30	290	10	16

**E) Pollution Control Equipment:**

**i) Cyclone separator:** The denser particles which are carried away by boiler flue gases will get separated in the cyclone separator and collected in the bottom of the cyclone separator at a definite interval.

**ii) Bag Filter:** The boiler flue gases from cyclone separator enter into pack of bag filters, where particulate matter will be separated leaving as cake on bags surface. They are cleared by shaking or vibrating by pulse jet causing the filter cake to be loosened and to fall in the Hopper.

**iii) Boiler Stack:** The adequate stack height of 30 mtrs will be provided for pollutants (SO<sub>2</sub>, NO<sub>x</sub>, PM & CO) dispersed in a very large area so that ground level concentration is within CPCB permissible limits.

**iv) Scrubbers:** Two scrubbers of 2-Stage are proposed to scrub the HCl, SO<sub>2</sub>, The packing media in the scrubber is 25mm poly propylene rings.

**3. BASELINE ENVIRONMENTAL STATUS****3.1 Study Area Included In Environmental Setting**

Studies were carried out in about 10 km radius area from the site with respect to meteorology, flora, fauna, land and socio-economies of the area. Further sampling and analysis of air quality, water quality, noise level and soil quality were carried out. The air quality, water quality, noise level and soil quality in the study area is evaluated based on this physical sampling and analysis.

The base line data were monitored during the study period of **March 2017 – May 2017**. The study team conducted site surveys and field experiments for gathering the information on air quality, water quality, noise quality and soil quality.

### 3.2 CLIMATE OF THE STUDY AREA

#### A. Temperature:

During the study period the minimum and maximum temperatures were recorded as 20 °C and 38 °C respectively.

#### B. Relative Humidity:

During study period at project site during study period, the relative humidity was recorded as 75%

#### C. Wind Pattern during Study Period

Dispersion of different air pollutants released into the atmosphere has significant impacts on neighborhood air environment. The dispersion/dilution of the released pollutant over a large area will result in considerable reduction of the concentration of a pollutant. The dispersion in turn depends on the weather conditions like the wind speed, wind direction, temperature, relative humidity, mixing height, cloud cover and also the rainfall in the area.

Wind speed and direction data recorded during the study period is useful in identifying the influence of meteorology on the air quality of the area. Wind roses on sixteen sector basis have been drawn. Wind directions and wind speed frequency observed during study period is given in Table 3.5 and wind rose diagrams are given in Figure 3.7

The following observations can be made from the collected data;

- Calm period is observed to be 16.9 % during the time of monitoring.
- The predominant wind direction is S & SE.
- Other than predominant wind directions wind was blowing in E direction.
- Average wind speed 2.73 m/s
- Mostly the wind speeds are observed to be in the range of 0.5 - 2.1 m/sec, 2.1-3.6 m/Sec, 3.6 -5.7 m/Sec, with frequency of distribution percentages ranges from 37.7, 16.2, & 15.2.

#### D. Rainfall

No rainfall during the study period at plant site. Average Annual Rainfall is 1011 mm.

**(Source: Ground water Brochure- Krishna District, CGWB)**

### 3.3 SAMPLING LOCATION DETAILS

Total eight locations were selected for Base line status. Air, Water & Noise results are presented in Table 10, 11 & 12 respectively.

### 3.4 AMBIENT AIR QUALITY

The ambient air monitoring was carried out for 24 hours a day, twice a week for 12 week per location in the study area. Ambient Air Quality Monitoring (AAQM) was carried out at eight locations during period of **March 2017 – May 2017**.

#### 1. Particulate Matter (PM<sub>10</sub>)

The maximum and minimum concentrations for PM<sub>10</sub> were recorded in the study area showed 98<sup>th</sup> percentile values in the range of 48.41 – 69.73 µg/ m<sup>3</sup>. The maximum concentration 69.73 µg/ m<sup>3</sup> were recorded at sampling locations at Dhramavarappadu Tanda. The concentrations of PM<sub>10</sub> are well below the CPCB standard of 100 µg/ m<sup>3</sup>.

#### 2. Particulate Matter (PM<sub>2.5</sub>)

The CPCB Standard for concentration of PM<sub>2.5</sub> is 60 µg/ m<sup>3</sup>. The maximum and minimum 98<sup>th</sup> percentile concentrations for Particulate Matter (PM<sub>2.5</sub>) monitored in the study area were 16.40 – 28.21 µg/m<sup>3</sup> respectively. Highest value of 28.21 µg/ m<sup>3</sup> was at Jaggayapet. The concentration of PM<sub>2.5</sub> is well below the prescribed limit of 60 µg/ m<sup>3</sup>

#### 3. Sulphur Dioxide (SO<sub>2</sub>)

98<sup>th</sup> percentile value of Sulphur dioxide in the study area from the monitored data was in the range of 10.87 – 17.84 µg/ m<sup>3</sup>. Maximum value of Sulphur dioxide of 17.84 µg/ m<sup>3</sup> obtained at Dhramavarappadu Tanda. The concentration of SO<sub>2</sub> is well below the prescribed limit of 80 µg/ m<sup>3</sup>

#### 4. Oxides of Nitrogen (NO<sub>x</sub>)

Ambient air quality status monitored for oxides of nitrogen in the study area were in the range with 98<sup>th</sup> percentile values between 15.95 – 25.39 µg/ m<sup>3</sup>. A maximum value of 25.39 µg/ m<sup>3</sup> was prevailing at the time of sampling at Dhramavarappadu Tanda. The concentration of NO<sub>x</sub> is well below the prescribed limit of 80 µg/ m<sup>3</sup>



**5. Carbon Monoxide(CO)**

The maximum and minimum 98<sup>th</sup> percentile concentrations for Carbon Monoxide (CO) monitored in the study area were 0.42 – 0.85 mg/m<sup>3</sup> respectively. Highest value of 0.85 mg/ m<sup>3</sup> was at the project site. The concentration of CO is well below the prescribed limit of 2 mg/ m<sup>3</sup>

**6. Ammonia (NH<sub>3</sub>)**

The maximum and minimum 98<sup>th</sup> percentile concentrations for Ammonia (NH<sub>3</sub>) monitored in the study area were 10.88 – 26.24 µg/m<sup>3</sup> respectively. Highest value of 26.24 µg/ m<sup>3</sup> was at Jaggayyapet. The concentration of NH<sub>3</sub> is well below the prescribed limit of 400 µg/ m<sup>3</sup>

**7. Volatile Organic Compounds (VOCs)**

Volatile Organic Compounds (VOCs) concentration in study area was found to be Below Detectable Limit of 1 ppm.

The ambient air quality monitoring results indicates that the overall air quality in the study area is within permissible standards prescribed by NAAQ Standards.

**TABLE- 8: THE MAXIMUM, MINIMUM & 98<sup>TH</sup> PERCENTILE VALUES FOR ALL THE SAMPLING LOCATIONS**

Code	Name of Sampling Location	PM <sub>10</sub> ( $\mu\text{g}/\text{M}^3$ )			PM <sub>2.5</sub> ( $\mu\text{g}/\text{M}^3$ )			SO <sub>2</sub> ( $\mu\text{g}/\text{M}^3$ )			NO <sub>x</sub> ( $\mu\text{g}/\text{M}^3$ )			CO (mg/M <sup>3</sup> )			NH <sub>3</sub> ( $\mu\text{g}/\text{M}^3$ )		
		Min	Max	98 <sup>th</sup>	Min	Max	98 <sup>th</sup>	Min	Max	98 <sup>th</sup>	Min	Max	98 <sup>th</sup>	Min	Max	98 <sup>th</sup>	Min	Max	98 <sup>th</sup>
A1	Project Site	48.36	55.60	55.42	19.24	24.50	24.09	9.21	12.20	12.02	13.47	15.60	15.95	0.28	0.58	0.58	8.64	11.20	11.02
A2	Pochampalli	50.32	58.10	58.01	19.34	24.10	23.82	12.09	15.60	15.42	15.83	19.20	18.83	0.26	0.42	0.42	10.27	12.30	14.17
A3	Vedadri Tanda	40.80	48.50	48.41	8.60	16.40	16.40	8.10	11.10	10.87	14.60	17.30	17.25	0.28	0.58	0.57	10.27	12.20	12.15
A4	Ravirala	40.50	48.90	48.67	8.20	16.90	16.62	8.30	11.60	11.37	14.90	18.20	18.20	0.28	0.56	0.56	8.15	11.20	10.88
A5	Jayanthipuram	54.61	59.10	58.96	20.68	24.50	24.34	10.35	13.10	12.82	14.07	17.40	17.03	0.37	0.55	0.54	12.94	16.20	16.11
A6	Jaggayapet	53.11	64.25	64.04	18.43	28.31	28.21	9.60	16.21	15.75	16.60	24.60	24.37	0.31	0.88	0.85	20.14	26.32	26.24
A7	Dharamavarappadu Tanda	61.70	70.24	69.73	21.71	28.31	28.00	14.33	18.21	17.84	18.42	25.44	25.39	0.31	0.88	0.82	16.24	24.10	23.82
A8	Gauravaram	24.80	57.50	56.95	16.20	25.20	24.69	11.10	13.42	13.29	15.28	18.20	17.94	0.12	0.43	0.43	8.99	11.40	11.39
<b>NAAQ Standards'</b>		<b>100</b>			<b>60</b>			<b>80</b>			<b>80</b>			<b>2</b>			<b>400</b>		

### 3.5 WATER QUALITY

Water sampling and subsequent analysis was carried out to determine both the groundwater and surface water quality of the study area.

Ground water samples and surface water samples were collected at 8 locations in the study area. These samples were analyzed for physical and chemical parameters to ascertain the Baseline status in the existing surface water and ground water bodies.

**TABLE-9: WATER ANALYSIS RESULTS**

S. No	Parameters	Ground water		Surface water	
		Min	Max	Min	Max
1	pH	7.63	8.37	7.54	8.52
2	Total dissolved solids (mg/l)	560	1210	495	905
3	Total hardness (mg/l)	295	670	210	455
4	Chlorides (mg/l)	44.92	333.9	107.4	214.9
5	Fluoride (mg/l)	<0.5	<0.5	<0.5	<0.5
6	Sulphates (mg/l)	16.67	131.4	55.63	109.08

- Ground water samples collected was analyzed as per the Standard methods and the water quality of the study area is found to be above the acceptable limits of IS-10500, for parameters TDS, Total hardness, Total Alkalinity, Calcium, Magnesium and Chloride.
- Surface Water samples collected at 8 locations within 10 kms radius from the study area.

### 3.6 NOISE ENVIRONMENT

Noise level monitoring was carried out at eight locations during the period of **March 2017 – May 2017**.

**Daytime Noise Levels (Lday)**

**Industrial Zone:** The day time noise level at the Project site was 63.5 dB (A), which is well below the permissible limits of 75 dB (A).

**Residential Zone:** The daytime noise levels in all the residential locations were observed to be in the range of 50.0 dB (A) to 53.3 dB (A). The noise levels at all the locations were below the permissible limits of 55 dB (A).

**Night time Noise Levels (Lnight)**

**Industrial Zone:** The night time noise level in the Project site was observed be 52.4 dB (A), which is well below the permissible limits of 70 dB (A).

**Residential Zone:** The nighttime noise levels in all the residential locations were observed to be in the range of 40.5 dB (A) to 43.3 dB (A). The noise levels were below the permissible limits of 45 dB (A) in nighttime at all the locations.

**TABLE-10: NOISE LEVELS OF THE STUDY AREA**

S. No	Name of the Location	Category of Area/zone	Day Time in Leq dB (A)	CPCB Standard Day Time	Night Time in Leq dB (A)	CPCB Standard Night time
1.	Project site	Industrial	63.5	75dB (A)	52.4	70dB (A)
2.	Pochampalli	Residential	53.2	55dB (A)	42.5	45dB (A)
3.	Gundabovinapalem	Residential	50.6	55dB (A)	43.3	45dB (A)
4.	Ravirala	Residential	52.4	55dB (A)	42.5	45dB (A)
5.	Jayanthipuram	Residential	53.3	55dB (A)	41.8	45dB (A)
6.	Kautavari Agraharam	Residential	51.6	55dB (A)	40.7	45dB (A)
7.	Dharamavarappadu Tanda	Residential	51.2	55dB (A)	42.6	45dB (A)
8.	Gauravaram	Residential	50.0	55dB (A)	40.5	45dB (A)

### 3.7 SOIL ENVIRONMENT

On data obtained, the soil quality at around the site is appropriate and normal in terms of soil contaminants.

### 3.8 LAND USE/ LAND COVER OF THE STUDY AREA

Land use / Land cover map is prepared by visual interpretation of high-resolution satellite data (Satellite Imagery Acquisition: 11-November-2016) and with the help of Survey of India Topographic maps on 1: 50,000 scale. Two seasons' data (Rabi year 2016) is used for the delineation of different units. The units are confirmed by the ground truth/field visits.

**TABLE-11: LAND USE / LAND COVER OF THE STUDY AREA**

S. No	LANDUSE	Area in SQ.KM	Area in Percentage (%)
1	Built Up Land	22.3	7.1
2	Water Bodies	23.2	7.4
3	Forest	36.4	11.6
4	Crop Land	172.1	54.8
5	Waste Lands	60.0	19.1
	<b>Total</b>	<b>314</b>	<b>100</b>

### 3.9 DEMOGRAPHIC AND SOCIO-ECONOMIC PROFILE

- The total population of the study area is 2,04,510 in which male and female population constitutes about 49.75 % and 50.25 % in the study area respectively.
- The literate male and female in the study area are 68,273 and 55,524 which implies that the percentage of literacy rate is 67.06% with male and 54.06% with female respectively.
- In the study area the main and marginal workers are 86,663 (42.3%) and 13,633 (6.7%) respectively of the total population while the remaining 1,04,214 (51.0%) constitutes non-workers
- All the Villages, in the study area, are electrified – both for Domestic Purpose and common facilities like, Street Lights, Public Water Pumping, etc. and also are provided with Domestic Water.

## 4.0 IDENTIFICATION, PREDICTION & MITIGATION MEASURES

### 4.1 Expected Air Environment

#### A. PROCESS EMISSIONS DETAILS

The Predicted Process emissions are SO<sub>2</sub>, O<sub>2</sub>, H<sub>2</sub> & HCl which are liberated from manufacturing process of proposed products.


**TABLE-12: PROCESS EMISSION DETAILS**

S. No	Name of the Gas	Quantity in Kg/Day	Treatment Method
1	Oxygen	27	Dispersed into the atmosphere
2	Hydrogen	2	Diffused by using Nitrogen through Flame arrestor.
3	Sulphur dioxide	7	Scrubbed by using C.S.Lye Solution
4	Hydrogen chloride	38	Scrubbed by using chilled water media

### 4.2 PROPOSED PROCESS EMISSION CONTROL SYSTEM

Scrubbers with 300 mm (Diameter) X 3 meters (Height) & 300mm (Diameter) X 3 meters (Height) capacities will be installed for control of process emissions. The Schematic diagram of emission control system is given below.

**FIGURE-1: SCHEMATIC DIAGRAM OF PROPOSED EMISSION CONTROL SYSTEM**

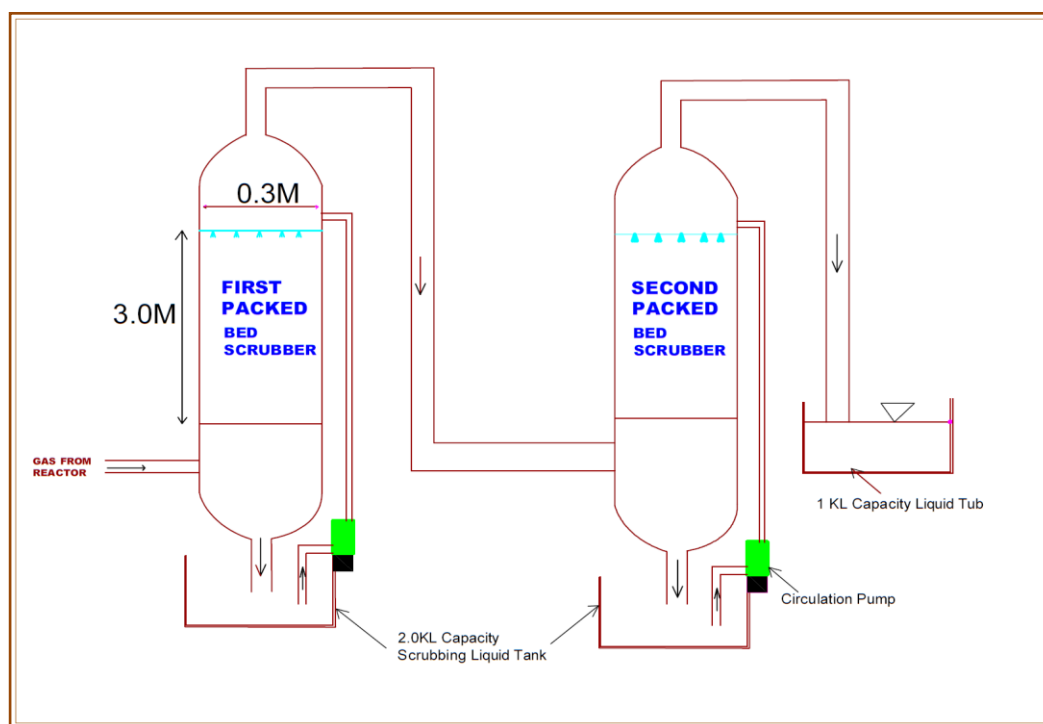

## B. EMISSIONS FROM BOILER

The Particulate matter generated from 3 TPH Boiler will be controlled by using cyclone separator followed by bag filters. The sulphur dioxide (SO<sub>2</sub>) and oxides of nitrogen (NO<sub>x</sub>) from boiler will be dispersed in to atmosphere by providing adequate stack height of 30 meters for effective dispersion and dilution.

The predicted ground level concentrations when added to Baseline scenario, the overall scenario levels of PM, SO<sub>2</sub> and NO<sub>x</sub> are well within the permissible limits as specified by NAAQ Standards.

**TABLE 13: RESULTANT CONCENTRATIONS DUE TO INCREMENTAL GLC's**

Pollutant	Maximum Baseline Concentration (µg/m <sup>3</sup> )	Incremental Concentrations due to Proposed Project (µg/m <sup>3</sup> )	Resultant Concentration (µg/m <sup>3</sup> )	NAAQ Standards (µg/m <sup>3</sup> )
PM	69.73	0.93	70.66	100
SO <sub>2</sub>	17.84	2.70	20.54	80
NO <sub>x</sub>	25.39	3.62	29.01	80

### 4.3 Expected Effluent Water Details

The waste water generation will be 10.64 KLD which is from process, floor & reactor washes, cooling tower blow down, boiler blow down, scrubber, DM plant and domestic usage. The effluent generation and its HTDS & LTDS effluent details are given below.

**TABLE-14: EXPECTED EFFLUENT GENERATION DETAILS**

S.No	Purpose	Effluent in KLD
1	Process	3.44
2	Washings	0.50
3	Boiler Blow down	3.00
4	Cooling towers Blow down	2.00
5	Scrubber system	0.50
6	Domestic	1.20
	<b>Total</b>	<b>10.64</b>

**TABLE-15: EXPECTED HTDS & LTDS EFFLUENT GENERATION DETAILS**

S.No.	Purpose	HTDS in KLD	LTDS in KLD	Effluent Generation in KLD	Treatment Method
1	Process	2.70	0.74	3.44	HTDS Effluent sent to stripper followed by MEE system. LTDS effluents treated in ETP along with MEE condensate. Treated effluent is sent to RO, RO permeate water is recycled and RO rejects taken for evaporation in MEE followed by ATFD to collect evaporation salts for disposal to TSDF.
2	Washings	0.00	0.50	0.50	
3	Boiler Blow down	0.00	3.00	3.00	
4	Cooling towers Blow down	0.00	2.00	2.00	
5	Scrubbing system	0.50	0.00	0.50	
6	Domestic	0.00	1.20	1.20	
<b>Total</b>		<b>3.20</b>	<b>7.44</b>	<b>10.64</b>	

**Effluent Treatment / Disposal:** Zero Liquid Discharge (ZLD) concept consisting of steam stripper, MEE system, ATFD, Biological Treatment and RO will be installed to treat the effluents generated from plant and to reuse the treated water.

The MEE System with 10 KLD Capacity & RO system with 15 KLD Capacity will be installed for treatment of effluents generated from plant operations.

#### 4.4 Noise Environment

The main sources of noise pollution in the plant operations are Boiler, Reactors, DG Set, compressors and other Noise generating units. Vehicular movements during operation phase for loading / unloading of raw materials and finished products and transporting activity may also increases the noise levels.

All the noise generating equipments like motor's, gear boxes and compressors will be regularly maintained with lubricating material to avoid noise generation. DG set will be provided with acoustic enclosures. A thick greenbelt will be developed along the periphery of the plant boundaries to minimize the noise pollution from the source.

#### 4.5 Land Environment

The plant activities are unlikely to alter the land-use pattern in the project site. The unit will take adequate measures for storage, handling and disposal of hazardous waste. Hence, there will be no significant adverse impact on land environment.



#### 4.6 Ecological Environment

Detailed flora and fauna studies were carried in the study area. As per baseline studies, there are no endangered, threatened & protected plants and animal species were recorded in the study area. Hence, no significant adverse impact is envisaged on ecology.

#### 4.7 Expected Hazardous and Solid Waste Details

The Hazardous / Solid waste generated and disposal methods from proposed project are given below.

**TABLE- 16: EXPECTED HAZARDOUS/SOLID WASTE GENERATION, DISPOSAL DETAILS**

S. No	Name of the Hazardous/Solid Waste	Quantity	Disposal Method
1	Organic waste (Process residue-46, Solvent Distillation Residue-74)	120 Kg/Day	Sent to Cement Industries
2	Spent Carbon	6 Kg/Day	Sent to Cement Industries
3	Inorganic Waste	4 Kg/Day	Sent to TSDF
4	MEE salts	257 Kg/Day	Sent to TSDF
5	ETP Sludge	50 Kg/day	Sent to TSDF
5	Used Oils	500 Ltrs/Annum	SPCB Authorized Agencies for Reprocessing/Recycling
7	Detoxified Containers	200 No's/Month	After Detoxification sent to outside agencies
8	Used Lead Acid Batteries	2 No's/Annum	Send back to suppliers for buyback of New Batteries
9	Ash from boiler	3.6 TPD	Sent to Brick Manufacturers

#### 4.8. Risk Assessment and Disaster Management Plan

The Risk assessment studies have been conducted for identification of hazards, to calculate damage distances and to spell out risk mitigation measures. The details are discussed in detail in Chapter – 7 of Draft EIA Report.

## **5.0 ENVIRONMENTAL MANAGEMENT PLAN**

### **5.1 ENVIRONMENT MANAGEMENT PLAN FOR CONSTRUCTION PHASE**

Adequate and effective environment protection measures will be planned and designed to minimize the impacts due to activities related to pre-construction (preparatory phase) of the project, machinery installation and commissioning stages and end with the induction of manpower and start up. The impacts identified during the construction phase are mainly due to site preparation, foundation work, material handling, and construction of buildings and installation of the machinery.

All possible care will be taken to reduce the noise levels due to construction activity. Also, noise prone activities shall be restricted to the extent possible during night particularly during the period of 10 PM to 6 AM in order to have minimum environmental impact.

### **5.2 ENVIRONMENT MANAGEMENT PLAN FOR OPERATIONAL PHASE**

#### **A) Air Pollution Management**

- The industry will take measures for reduction of fugitive emissions emanating out of process reactions by providing vent condensers.
- Good ventilation will be provided to reduce the workroom concentrations.
- Fugitive emissions will be reduced by providing vent condensers to the all the reactors.
- Adequate stack height of 30 Mtrs will be provided to the 3 TPH boiler.
- Stack monitoring facilities for the periodic monitoring of the stack to verify the compliance of the stipulated norms. Apart from this Cyclone Separator, Bag filters will be provided to the boiler.
- In order to minimize the air pollution, unit will develop greenbelt in and around its premises.

#### **B) Water Pollution Management**

- Effluent generated in the plant will be treated in Proposed ZLD system.
- The industry is proposing to install a MEE System with 10 KLD capacity, Biological Treatment system of 15 KLD and RO system with 15 KLD

capacities for treatment of 10.64 KLD effluents generated from plant operations.

- Total Water requirement is **38.50 KLD** out of which **8.87 KLD** water recovered from ZLD system is reused. The fresh water of **29.63 KLD** will be met from Surface water and Ground Water sources.
- Unit is proposed to recharge ground water through roof water harvesting pits in the project area and rain water harvesting pits outside plant area wherever possible to balance the water table.
- Use of high-pressure hoses for cleaning the floor and process equipment to reduce the amount of wastewater generated during washings.

### C) Noise Pollution Management

- Noise suppression measures such as enclosures, buffers and / or protective measures will be provided, if required. (wherever noise level is more than 90 dB (A)).
- Extensive oiling, lubrication and preventive maintenance will be carried out for the machineries and equipments to reduce noise generation.
- Greenbelt Development.

### D) Hazardous & Solid Waste Management

To reduce the quantity of solid / hazardous waste generation as well as possible contamination of land (soil) due to spillages / leaks from the plant operations, following Mitigation measures are proposed:

- There will not be any leakages / spillage from the raw-materials storage.
- The generated Hazardous waste will be stored on floor with suitable packing and this dedicated area will be covered with the roof.
- The records on quantity of hazardous waste generation and disposal will be maintained for each category and possibilities will be explored for minimization and reuse.

**E) Green Belt**

Greenbelt will be developed in an area of 1.08 Acres (4329.25 Sq.m). The industry will spend 4 Lakhs as capital cost for planting of samplings. Lists of plants suitable for greenbelt as per the local agro climatic conditions are given in the Draft EIA Report.

**F) Solvent Recovery**

Solvents will be recovered upto 95% using distillation column and necessary cooling condensers.

**5.3 ENVIRONMENT MANAGEMENT CELL**

**Sarvani Labs Pvt Ltd** will have a dedicated Environmental Management Cell with experienced staff to look after the proper environmental management of the plant including operation & maintenance of all pollution control facilities.

**5.4 ENVIRONMENT MONITORING PROGRAM**

Regular monitoring of environmental parameters is of immense importance to assess the status of environment during project operation. The regular monitoring will be carried out with the MoEF&CC Registration / NABL Accredited Laboratory.


**6. PROPOSED ROOF WATER HARVESTING**

Roof top rainwater harvesting is one of the appropriate options for augmenting ground water recharge/ storage in this industry.

The following table gives expected quantity of rain water harvesting using buildings area Roof top.

**TABLE- 17: AVAILABLE RAINWATER (ANNUAL) FOR HARVESTING**

Description	Area (m <sup>2</sup> )	Rainfall (m/Annum)	Runoff coefficient	Total Rainwater (m <sup>3</sup> /Annum)
Roof Area	2986.15	1.01	0.8	2412.80
Total available rainwater (in m <sup>3</sup> /annum)				2413

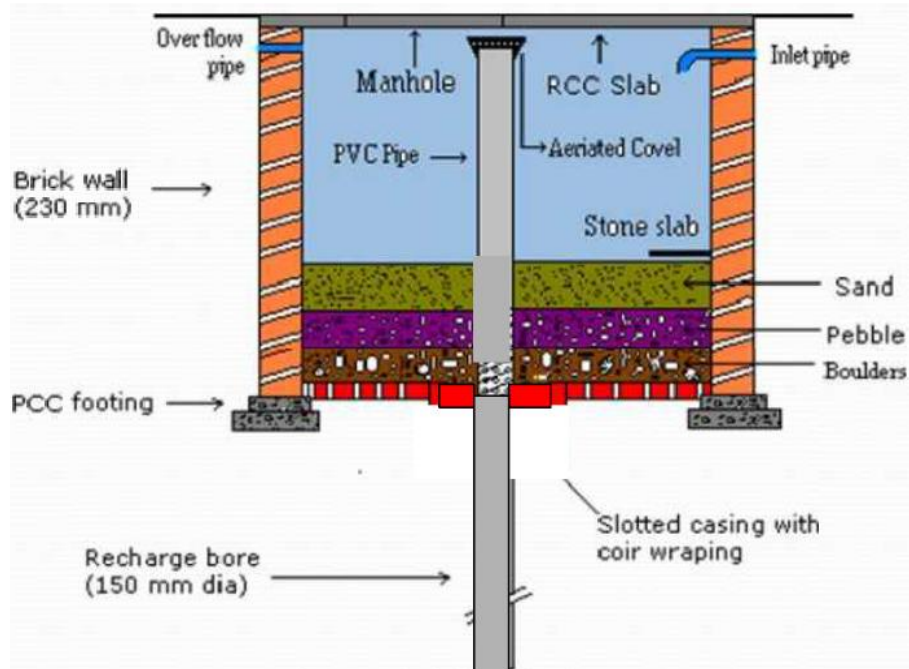**FIGURE-2: PROPOSED ROOF WATER HARVESTING STRUCTURE**

## 7. EMP BUDGET

The unit has proposed for **100 Lakhs** as capital cost and **19 Lakhs** as recurring cost for environment pollution control measures.

**TABLE- 18: PROPOSED BUDGET FOR ENVIRONMENTAL MANAGEMENT PLAN [EMP]**

S. No	Particulars	Proposed Capital Cost (Rs. Lakhs)	Recurring Cost (Rs. Lakhs)
1	Pollution Control Equipment (Scrubbers, Cyclone separator, Bag filter , Sampling port arrangements etc.,)	15.0	4.0
2	ZLD System (MEE, RO, necessary modification of ETP system)	75.0	10.0
3	Rain Water Harvesting (Roof top water collection pit and Roof top water towards the rain water harvesting pit)	3.0	0.0
4	Green Belt Development (Plantation and Maintenance)	4.0	1.0
5	Health & Safety (PPEs, Medical Surveillances Expenses etc.,)	3.0	2.0
6	Environmental Monitoring (Air, Water, Noise, VOCs, Boiler Stack flue gases, DG sets stack monitoring expenses etc.,)	0.0	2.0
	<b>Total</b>	<b>100</b>	<b>19</b>

## **8.0 SOCIO-ECONOMIC DEVELOPMENT**

It is predicted that socio-economic impact due to this project will positively increase the chance of more employment opportunities for local peoples. There are no Resettlement and Rehabilitation issues involved in this project. The project infrastructures will be of use to people of the area. The revenue of the village will be definitely increased due to the proposed project.

## **9.0 PROJECT BENEFITS**

Proposed project will result in considerable growth and upliftment of local community in the nearby villages by providing the employment. The project will generate direct and indirect employment to the nearby villages and the unavailable technical persons will be recruited from outside.

## **10.0 CONCLUSION**

**Sarvani Labs Pvt Ltd** has committed to implement all the pollution control measures to protect the surrounding environment – adapting Zero-Liquid-Discharge System for all its Effluents, by controlling process emissions and Safe-Disposal of all Solid Wastes – generated either as process wastes or packing wastes.

The project can definitely improve the regional, state and national economy. Industrial growth is an indication of all-round Socio-Economic Development – by generating local Employment and Business Opportunities. The implementation of this project will definitely improve the physical and social infrastructure of the surrounding area.